


Chapter 2

Application Layer

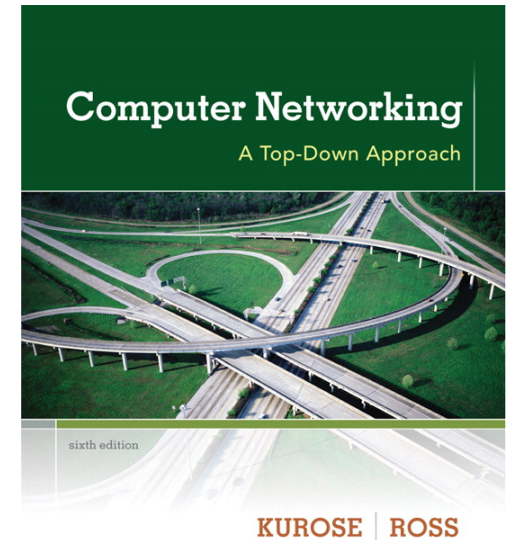

*Computer
Networking: A Top
Down Approach*
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012


All material copyright 1996-2012
J.F Kurose and K.W. Ross, All Rights Reserved

©

Socket programming

goal: learn how to build client/server applications that communicate using sockets

socket: door between application process and end-end-transport protocol

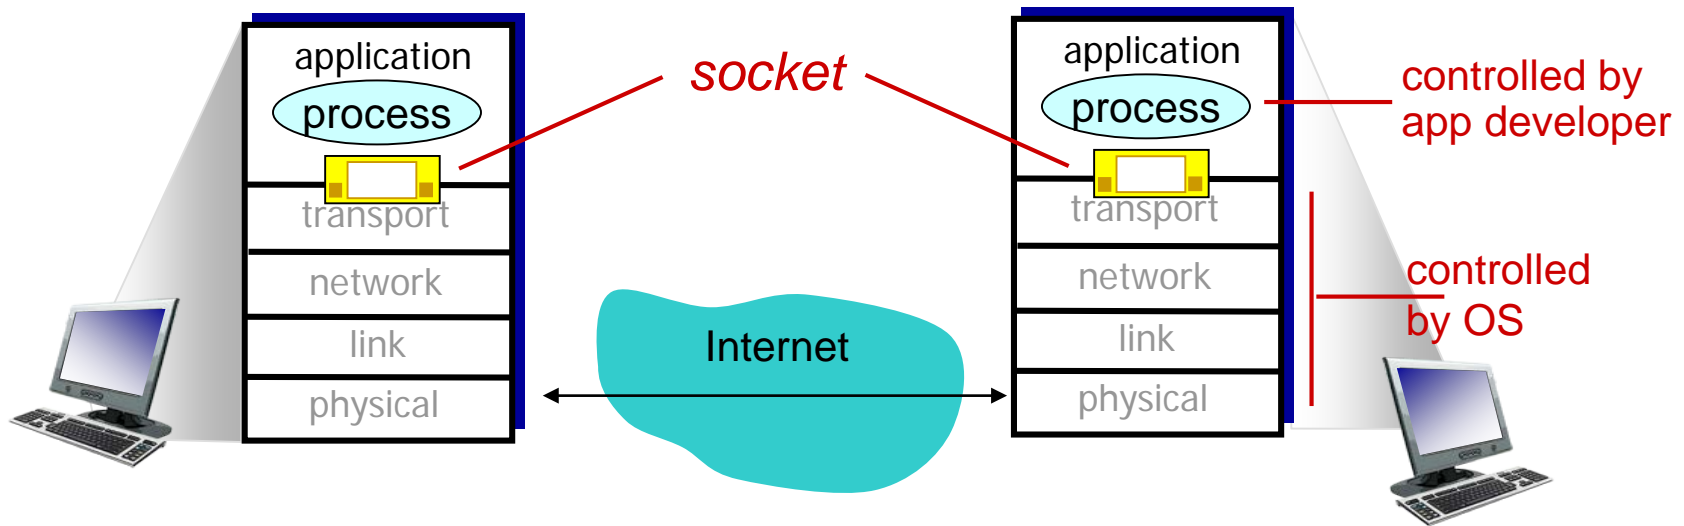

Addressing processes

- ❖ to receive messages, process must have *identifier*
- ❖ host device has unique 32-bit IP address
- ❖ Q: does IP address of host on which process runs suffice for identifying the process?
 - A: no, *many* processes can be running on same host
- ❖ *identifier* includes both **IP address** and **port numbers** associated with process on host.
- ❖ example port numbers:
 - HTTP server: 80
 - mail server: 25
- ❖ to send HTTP message to gaia.cs.umass.edu web server:
 - **IP address**: 128.119.245.12
 - **port number**: 80
- ❖ more shortly...

Socket programming

Two socket types for two transport services:

- **UDP:** unreliable datagram
- **TCP:** reliable, byte stream-oriented

Application Example:

1. Client reads a line of characters (data) from its keyboard and sends the data to the server.
2. The server receives the data and converts characters to uppercase.
3. The server sends the modified data to the client.
4. The client receives the modified data and displays the line on its screen.

Socket programming *with TCP*

client must contact server

- ❖ server process must first be running
- ❖ server must have created socket (door) that welcomes client's contact

client contacts server by:

- ❖ Creating TCP socket, specifying IP address, port number of server process
- ❖ *when client creates socket:* client TCP establishes connection to server TCP

- ❖ when contacted by client, *server TCP creates new socket* for server process to communicate with that particular client
 - allows server to talk with multiple clients
 - source port numbers used to distinguish clients (more in Chap 3)


application viewpoint:

TCP provides reliable, in-order byte-stream transfer (“pipe”) between client and server

Client/server socket interaction: TCP

server (running on `hostid`)

client

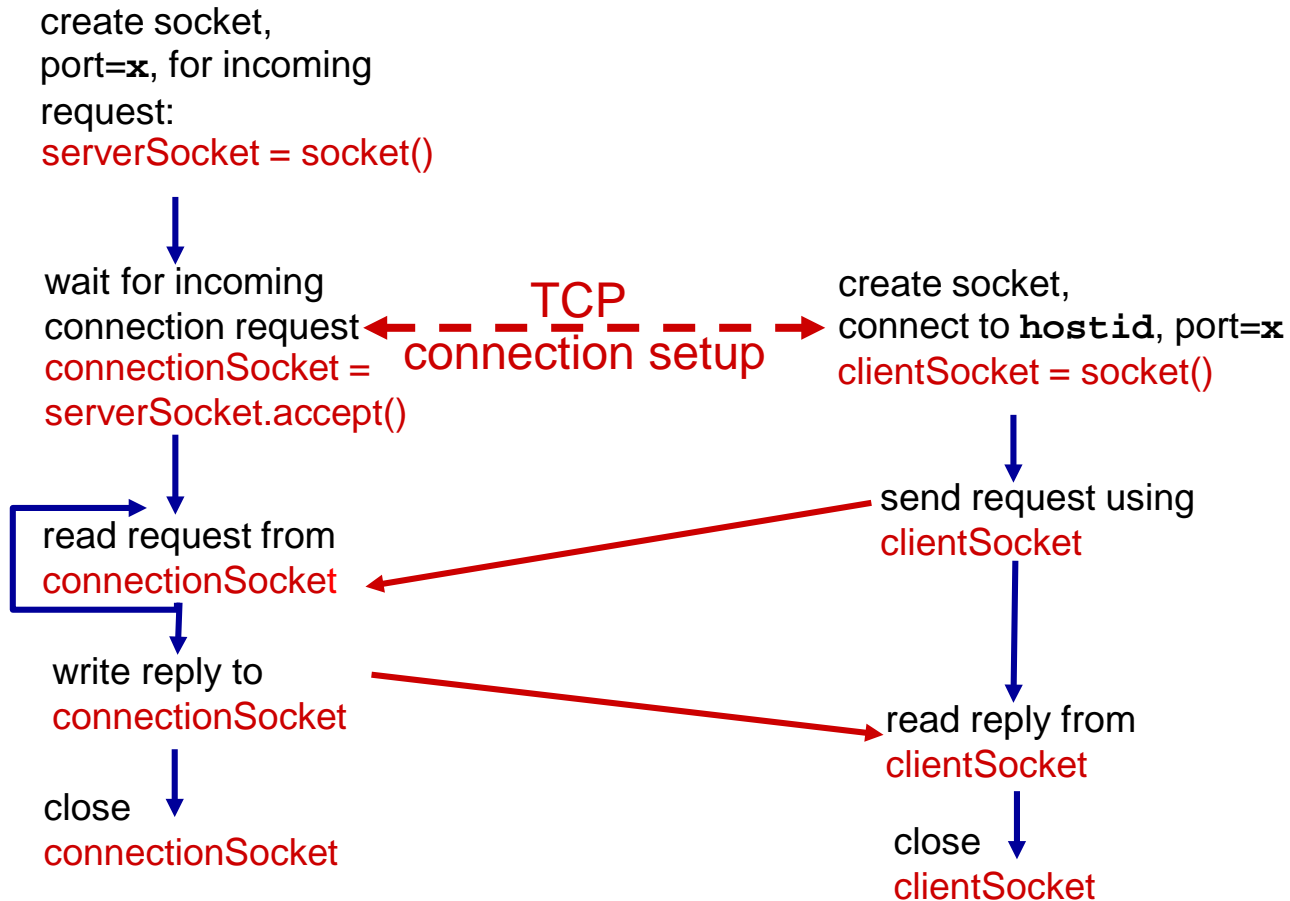

Socket programming *with* UDP

UDP: no “connection” between client & server

- ❖ no handshaking before sending data
- ❖ sender explicitly attaches IP destination address and port # to each packet
- ❖ rcvr extracts sender IP address and port# from received packet

UDP: transmitted data may be lost or received out-of-order

Application viewpoint:

- ❖ UDP provides *unreliable* transfer of groups of bytes (“datagrams”) between client and server

Client/server socket interaction: UDP

server (running on *serverIP*)

create socket, port= x:
`serverSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
read datagram from
`serverSocket`

↓
write reply to
`serverSocket`
specifying
client address,
port number

client

create socket:
`clientSocket =
socket(AF_INET,SOCK_DGRAM)`

↓
Create datagram with server IP and
port=x; send datagram via
`clientSocket`

↓
read datagram from
`clientSocket`

↓
close
`clientSocket`